


Kerek búvónyílás periférikus zárakkal

Round manhole with peripheral closings

Runde Klapptür mit Flachrahmen und Spannvorrichtungen

mod. **6023**


AISI 304/L - 316/L

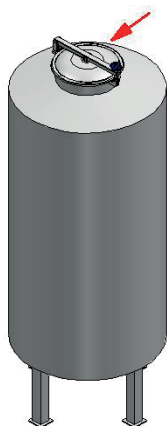



Kragen - Frame - **Keret** ① ST
Deckel - Cover - **Fedél** ② MR
Dichtung - Gasket - **Tömítés** ③
Handgriff - Handwheel - **Zárótekerő** ④

MOD.	DN	Di	A	B	C	D	E	N° ④	P.max bar	Vacuum bar
6023 A	200	220	8	1.5	60	136	240	3	3	-0.5
6023 B	300	300	8	1.5	60	136	321	4	3	-0.5
6023 C	400	398	8	1.5	60	137	420	5	1.5	-0.5
6023 D	500	500	8	1.5	60	136	526	6	1.5	-0.5
6023 E	600	600	8	1.5	60	144	630	7	1	-0.3

P.Max : Maximális üzemi nyomás -20°C / +50°C-ig
Maximum working pressure to -20°C / +50°C

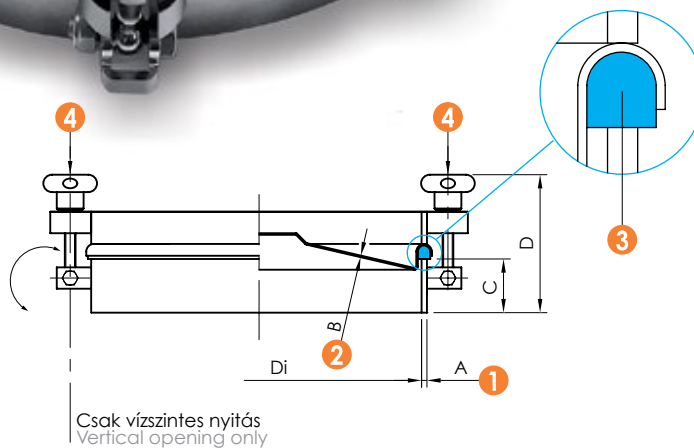

Opcionális önnyitó rugó
Optional self opening spring

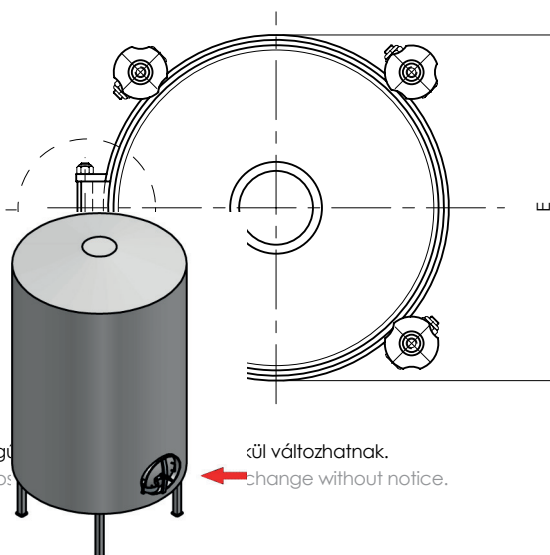

Az ebben a dokumentumban megadott információk kizárólag tájékoztató jellegűek.
The informations provided in this document are intended for informational purposes.

↔ ül változhatnak.
↔ change without notice.