

Kerek bűvónyílás szigetelt fedéllel

Round manhole with insulated lid

Runde Druckverschlüsse mit isoliertem Deckel


mod. **6023 H**

Visszatartásmentes fedél

Retention free cover Freie

Entleerung Deckel


AISI 304/L - 316/L

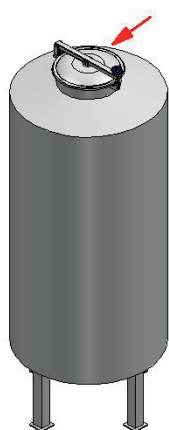

- Kragen - Frame - **Keret** ① ST
Deckel - Cover - **Fedél** ② MR
Dichtung - Gasket - **Tömítés** ③
Handgriff - Handwheel - **Zárótekerő** ④
Isolierung - Insulation - **Szigetelés** ⑤

MOD.	DN	Di	A	B	C	D	E	N° ④	P.max bar	Vacuum bar
6023 H2	200	220	8	1.5	60	135	240	3	3	-0.5
6023 H3	300	300	8	1.5	60	135	321	4	3	-0.5
6023 H4	400	398	8	1.5	60	136	420	5	1.5	-0.5
6023 H5	500	500	8	1.5	60	165	526	6	1.5	-0.5
6023 H6	600	600	8	1.5	60	165	630	7	1	-0.3

P.Max : Maximális üzemi nyomás -20°C / +50°C-ig
Maximum working pressure to -20°C / +50°C

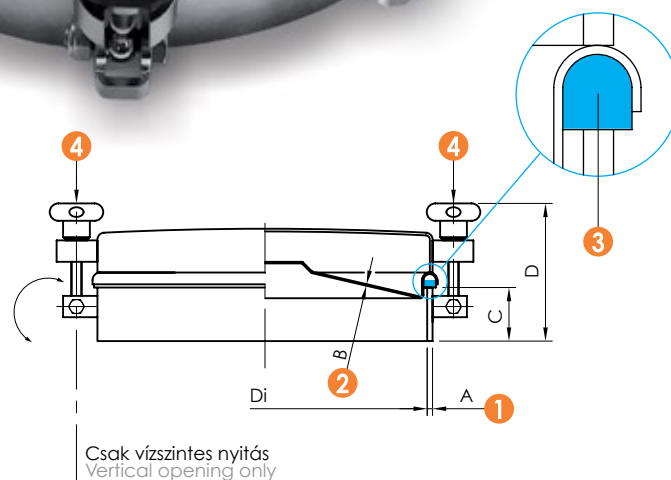

Optionális önnyitó rugó
Optional self opening spring

